

# INVENGO GREAT WALL LABEL



80% of real size

## Impinj Monza R6



## About Invengo's Great Wall™

The Invengo Great Wall™ tags and inlays, equipped with the Impinj Monza™ R6 IC's, are designed to enable end-users to reach and sustain high levels of performance in all global RAIN RFID (UHF) frequency regions. Within the area of global retail, industrial automation and supply chain, Invengo's Great Wall™ tags and inlays can be called one of the best in class and are approved in most University of Auburn categories.



Invengo – the global RFID technology provider – is a leading developer and manufacturer of high quality, intelligent RAIN RFID (UHF) and HF/NFC connectivity solutions and consumables (tags & inlays) utilized in the Internet of Things. With a focus on RFID innovation, Invengo has created a leading product line in retail, (industrial) laundry, library, (public) transportation, healthcare and many other industries.

Invengo Technology Pte. Ltd. (SG) is the International Headquarters of Invengo Information Technology Co. Ltd, listed on Shenzhen Stock Exchange (SZSE: 002161.SZ). Employing over 600 people globally, Invengo is one of the largest publicly traded, RFID oriented companies in the world.

## Key Benefits

- High performance product with excellent performance on lower detuning materials
- University of Auburn approved
- Serialized TID
- ISO 9001:2008 Quality Management System and ISO 14001:2004 Environment Management System support
- 100% Quality Tested

## Application Areas

- Global Retail
- Industrial Automation
- Supply Chain Management

# Product Specifications

## RFID

<b>Protocols Supported</b>	EPCglobal C1 Gen 2, ISO/IEC18000-63
<b>Integrated Circuit (IC)</b>	Impinj Monza R6
<b>Operating Frequency</b>	840 to 960MHz
<b>EPC size</b>	96 bits
<b>TID</b>	48 bits serialized number
<b>Access password</b>	none
<b>Kill password</b>	none

## Environmental

<b>Operating Temperature</b>	-40°C to 85°C (-40°F to 185°F)
<b>Recommended</b>	-20°C to 77°C (-4°F to 122°F)
<b>Storage Temperature</b>	-40°C to 85°C (-40°F to 185°F)
<b>Recommended</b>	25°C (77°F)
<b>Shelf Life</b>	Min. 2 yrs from date manufacturing in 20°C (68°F) @ 50% RH
<b>Bending Diameter</b>	> 50 mm, tension max. 10 N
<b>Static Pressure</b>	<10 MPa (10 N/mm2)
<b>ESD</b>	± 2000V peak
<b>Adhesive</b>	Acrylic
<b>Data retention</b>	50 years
<b>Endurance</b>	100.000 cycles

## Dimensions

<b>Antenna Size (A x B)</b>	94 x 10 mm (3.70 x 0.39 in)
<b>Die-cut Size (C x D)</b>	96 x 12 mm (3.78 x 0.47 in)
<b>Web Width (E)</b>	100 mm (3.94 in)
<b>Pitch (F)</b>	20,7 mm (0.82 in)
<b>PET Thickness</b>	0,05 mm (0.002 in)
<b>Antenna Thickness</b>	0,009 mm (0.0003 in)
<b>Die-cut to edge (G)</b>	2 mm (0.08 in)
<b>Core Size (H)</b>	76 mm (3 in)

## Certifications

<b>ARC Approval Categories</b>	Spec: A-B-C-D-I-K-M-G-F-N-Q
<b>Retail Approval</b>	Target

## Order Information

<b>Product code</b>	XC-TF8030B-C17-FPI
<b>Packaging</b>	Carton boxes
<b>Box Size</b>	265x253x120mm (10.43 x 9.96 x 4.72 in)
<b>Weight</b>	± 2,0 kg (4.41 lbs)/roll ± 2,3 kg (5.07 lbs)/box
<b>Quantity pc p/roll; roll p/box</b>	4000 pcs/roll; 1 rolls/box


## Inlay Design



## Inlay Stackup

	Paper Face
	Adhesive
	PET Substrate
	Aluminium Antenna
	IC
	Adhesive
	Silicone Liner

## Winding / Dimensions

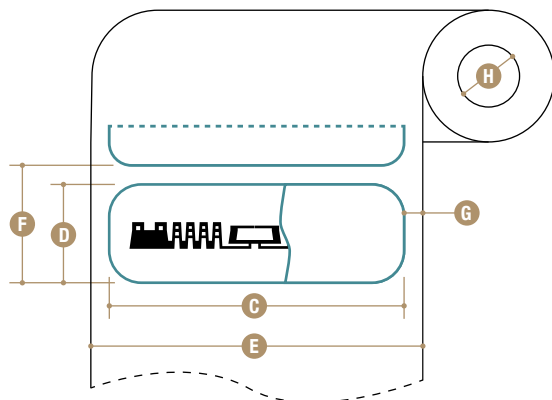

### APAC / International HQ

**Invengo Technology Pte. Ltd**  
10 Kallang Avenue  
#05-15 Tower 2, Aperia  
Singapore 339510

Office: +65 6702 3909  
sales.apac@invengo.com

### Americas

**Invengo Technology Corp.**  
2700-160 Sumner Blvd.  
Raleigh, NC 27616  
United States of America

Office: +1 919 890 0202  
sales.americas@invengo.com

### EMEA / Global Textile Services

**Invengo Technologies**  
180 Voie Ariane – Athélie 1  
13600 La Ciotat  
France

Office: +33 413 96 1111  
sales.emea@invengo.com